

Terminal: Conector Rápido

Terminal: Push-wire

Fijación: Conector Clip-M8

Fixing: Snap-In-M8


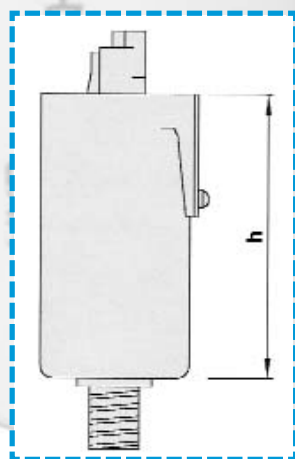
Carcasa: Plástico

Can: Plastic

 SERIE RIFR8CR_{xxx}P25

Código Code	Capacidad Capacitance μ F	Tensión Voltage Vac	Diámetro Diameter mm	Longitud Length h (mm)	Und. Caja Unit Box	P.V.P. €/Und
RIFR8CR020P25 *	2	250	25	52	140	1,72
RIFR8CR030P25 *	3	250	25	52	140	1,76
RIFR8CR035P25 *	3,5	250	25	52	140	1,80
RIFR8CR040P25 *	4	250	25	52	140	1,84
RIFR8CR045P25 *	4,5	250	25	52	140	1,95
RIFR8CR050P25 *	5	250	25	52	140	1,98
RIFR8CR055P25 *	5,5	250	25	52	140	2,00
RIFR8CR060P25 *	6	250	25	70	140	2,03
RIFR8CR070P25 *	7	250	25	70	140	2,17
RIFR8CR080P25 *	8	250	30	74	110	2,33
RIFR8CR090P25 *	9	250	30	74	110	2,41
RIFR8CR100P25 *	10	250	30	74	110	2,54
RIFR8CR110P25 *	11	250	30	74	110	3,04
RIFR8CR120P25 *	12	250	30	74	110	3,15

Se suministran otras capacidades bajo demanda / Other capacitance under demand

 * Homologación
 * Approval

 UNE-EN-61048 / AI
 61049