

Terminal: Manguera 210 mm

Terminal: 210 mm Twin Cable

Fijación: Ninguno

Fixing: None

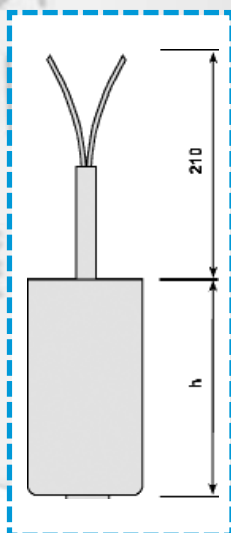
Carcasa: Plástico

Can: Plastic

 SERIE RMLMG<sub>xxxx</sub>P45

Código Code	Capacidad Capacitance $\mu$ F	Tensión Voltage Vac	Diámetro Diameter mm	Longitud Length h (mm)	Und. Caja Unit Box	P.V.P. €/Und
RMLMG0020P45	2	450	25	52	165	2,39
RMLMG0030P45	3	450	30	56	110	2,65
RMLMG0040P45	4	450	30	56	110	2,72
RMLMG0050P45	5	450	30	56	110	2,85
RMLMG0060P45	6	450	30	56	110	2,96
RMLMG0070P45	7	450	30	74	110	3,10
RMLMG0080P45	8	450	30	74	110	3,19
RMLMG0100P45	10	450	30	74	110	3,47
RMLMG0120P45	12	450	35	74	85	3,84
RMLMG0140P45	14	450	35	74	85	4,14
RMLMG0160P45	16	450	35	74	85	4,65
RMLMG0180P45	18	450	35	98	85	4,92
RMLMG0200P45	20	450	35	98	85	5,16
RMLMG0200P45	20	450	40	94	65	5,19
RMLMG0220P45	22	450	35	98	85	5,77
RMLMG0250P45	25	450	40	94	65	6,08
RMLMG0300P45	30	450	40	94	65	6,58
RMLMG0350P45	35	450	40	94	65	8,49
RMLMG0400P45	40	450	45	98	50	9,91
RMLMG0450P45	45	450	45	98	50	11,04
RMLMG0500P45	50	450	50	98	40	11,82
RMLMG0550P45	55	450	55	120	30	12,72
RMLMG0600P45	60	450	55	120	30	13,29
RMLMG0650P45	65	450	55	120	30	15,66

Se suministran otras capacidades bajo demanda / Other capacitance under demand


 UNE-EN-60252  
 400V HPF PV  
 450V HPF QV